


Rugged Handheld

EM-I61J

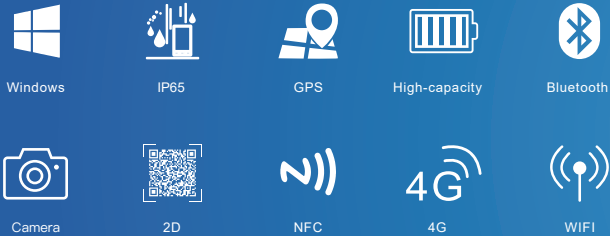

Functions

- Support for Windows 11/10 system
- Equipped with front 5 million and rear 8 million pixel auto focus camera
- Support 4G all network communication, Dual-band WiFi, Bluetooth and other communication modes
- Removable 7.4V 4000mAh high-voltage high-capacity battery, supports PD fast charging
- Support GPS, Glonass, more accurate positioning
- Support NFC and the optional 2D module , to meet the application needs of multiple industries
- IP65 high protection level, in accordance with MIL-STD-810H

Product Six Views



Specification Parameter

Basic parameters	
Dimension	183.1*88.6*24.1mm
Weight	Device unit 470g
Device Color	Black
LCD	6.5 inch TFT 20:9, 720*1600, 400cd/cm ²
Touch Panel	10 point G+FF capacitive touch screen Corning® Gorilla® Glass
Camera	Front 5.0MP Rear 8.0MP
I/O	TYPE-C 2.0*1 OTG (Data transmission) Standard USB-A port/Data Transfer (3.0) TF card *1, Max: 512GB Nano-SIM * 1 Pogo Pin (Suitable docking charger DC61J)
Power	PD Fast Charge Adapter
Communication	
WIFI	WIFI 802.11(a/b/g/n/ac) Dual frequency 2.4G+5.8G WIFI
Bluetooth	BT5.0 Transmission distance: greater than 10m
3G/4G	LTE FDD: B1/B3/B7/B8/B20 LTE TDD: B40 WCDMA: B1/B5/B8 GSM: 900/1800 Optional: LTE-FDD:B2/4/5/12/13/17/18/25/26 LTE-TDD:B41 WCDMA: B2/4/5 CDMA&EVDO: BC0/BC1 GSM: 850/1900 LTE-FDD: B2/4/5/7/8/28 LTE-TDD:B40 WCDMA: B2/5/8 GSM:850/900/1900
GNSS	GPS+GLONASS

Performance parameter	
CPU	Intel JASPER LAKE N5100
OS	Windows 11/10
RAM	8GB
ROM	128GB
Battery	
Capacity	7.4V/4000mAh
Type	External polymer lithium ion battery
Endurance	About 6 hours(50% volume sounds, 50% screen brightness, 1080P HD video display by default)
Reliability	
Operate Temperature	-20 °C ~ 60 °C
Store Temperature	-30 °C ~ 70 °C
Humidity	95% Non-Condensing
Rugged Feature	IP65 certified, MIL-STD-810H certified
Drop Height	1.5m
Data Collection	
NFC	Support, 13.56MHz, Support ISO/IEC 14443A/14443B/15693/18092/ mifare protocol Card reading distance: 3-5cm
2D	Optional, Optical resolution: 5mil Scanning speed: 30 times/s Support code: PDF417, MicroPDF417, Data Matrix, Data Matrix Inverse, Maxicode, QR Code, MicroQR, QR Inverse, Aztec, Aztec Inverses, Han Xin, Han Xin Inverse

The Accessories

				
PD Fast charge adapter	Hand-strap	Docking charger DC61J	Vehicle Mount	TP Resist film
Standard	Standard	Optional	Optional	Support mass customization